

## Dibutyltin monoethyl maleate CAS25168-21-2 BT-58C

### Overview:

Product Name: Dibutyltin monoethyl maleate 25168-21-2

Chinese alias: bis (isooctyl maleic acid) dibutyl tin dibutyl tin bis (isooctyl maleate) monoethyl maleate dibutyl tin dibutyl tin bis (isooctyl maleate)


English alias: 2-Butenedioicacid (2Z)-, 1,1'-(dibutylstannylene) 4,4'-diisooctyl ester4-O-[dibutyl-[(Z)-4-(6-methylheptoxy)-4-oxobut-2-enoyl]oxystannyl] 1-O-(6-methylheptyl) (Z)-but-2-enedioateDI-n-BUTYLBIS(2-ETHYLHEXYLMALEATE)TIN,

Product designation: BT-58C

English name: Di-n-butyltin Di (Monoethyl Maleate)

CAS number: 25168-21-2

Molecular formula: C<sub>32</sub>H<sub>56</sub>O<sub>8</sub>Sn

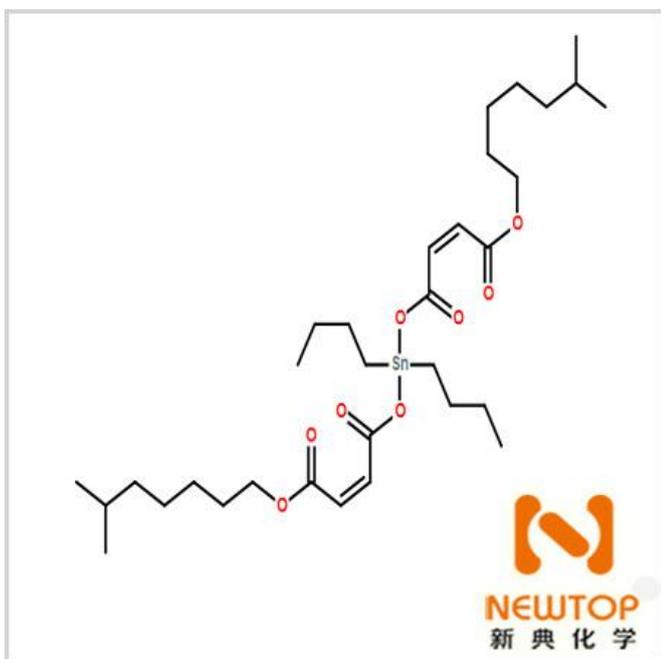

### Physical and chemical properties:

Accurate molecular weight: 688.30000

Isotope mass: 688.3

Number of isotopes: 0

Number of hydrogen bond donors: 0

Number of hydrogen bond acceptors: 8

Number of heavy atoms: 41

Number of rotatable chemical bonds: 28

Complexity: 738

项目	指标
锡含量 (%)	17.20 - 18.10
比重 (g/cm <sup>3</sup> , 30℃)	1.140 - 1.160
折光率 (25℃)	1.4700 - 1.4995

**Experimental features:**

Density: 1,145 g/cm<sup>3</sup>

Melting point: -25 ° C

Boiling point: 618.1 ° C at 760 mmHg

Flash point: 123 ° C

PSA: 105.20000

LogP: 7.74680

**Security Information:**

Hazard category code: 20/21/22-36/37/38

Safety Instructions: S26; S36/37/39

Risk term: R20/21/22

TSCA: Yes

**use:**

Yellow oily liquid

This product is a heat stabilizer for PVC products and has excellent long-term stability and weather resistance. Can improve initial coloring and promote gelation

**Storage and transportation:**

Should be sealed and stored in a dry, cool and ventilated warehouse

**package:**

200KG/drum Storage: It is recommended to store in a dry and cool area with proper ventilation. After the original packaging, please fasten the packaging cover as soon as possible to prevent the water and other substances from mixing into the product and affecting its performance. Store in a cool, dry place, keep the container sealed and avoid contact with oxides. Do not breathe dust, avoid skin and mucous membrane contact. Smoking, eating and drinking are prohibited in the workplace. After work, shower and change clothes. Store contaminated clothing separately and wash it before reuse. Maintain good hygiene habits.

Company Name:	Newtop Chemical Materials (Shanghai) Co., Ltd.
Sales Manager:	Hunter
E-Mail:	<a href="mailto:Hunter@newtopchem.com">Hunter@newtopchem.com</a>
Tel:	+86 21-5161 9972
Mobile Phone:	+86-18301903153

Address:	Rm. 1104, No. 258, Songxing West Road, Baoshan District, Shanghai, China (Mainland)
Website:	<a href="http://www.newtopchem.com">www.newtopchem.com</a>

## FAQ

Q1: May I get one sample before placing order?

Re: Yes, Sample are available. For normal products, samples are for free and you just need to bear the freight; For those high value products, you just need to freight and certain product cost. When we both cooperate for some times or when you are our VIP customer, free sample will be offered when you need.

Q2: Which payment is available for your company?

Re: T/T, L/C ,You can choose the one which is convenient for you.

Q3: How and when can I get my goods after payment?

Re: For small quantity products, they will be delivered to you by international courier(DHL, FedEx, TNT etc.) or by air. Usually it will cost 3-5days that you can get the goods after delivery.For large quantity products, shipping by sea is worthwhile.It will cost days to weeks to come to your destination port, which depends on where the port is.

Q4: Is there any possible to use my appointed label or package?

Re: Yes. If needed, we'd like to use label or package according to your requirement.

Q5: How can you guarantee the goods you offer is qualified?

Re: We always believe honesty and responsibility are basis of one company, so whatever products we provide for you all are qualified.